

ideal
HEATING

COMMERCIAL

FLEXI HOSE


ECOMOD 290HT & ECOMOD R32
COMMERCIAL HEAT PUMPS



Easy to fit



Suitable for
heat pumps

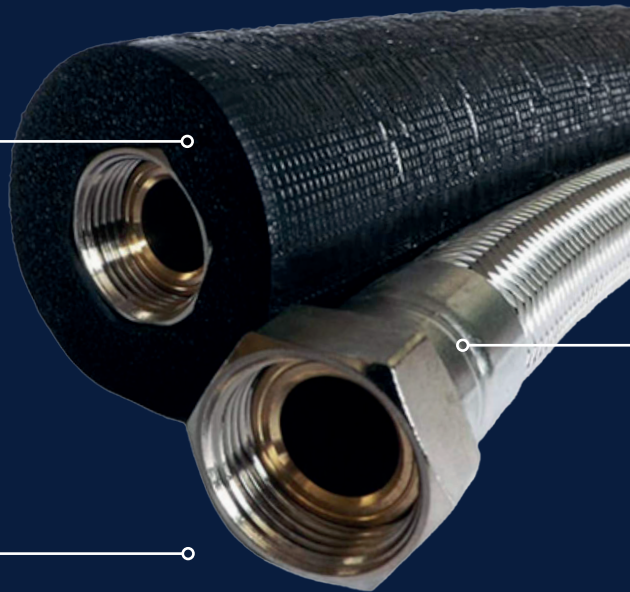

STAINLESS
STEEL

Stainless steel

FLEXI HOSE

TECHNICAL SPECIFICATIONS

The flexible hose helps to avoid transmission of vibration in the pipe work and allows for a smooth bend when connecting the flow and return pipe to the heat pump.

The hose is sleeved within a stainless steel braid for added protection, available in female BSP (British Standard Pipe) thread at one end and a compression fitting at the other. All flexible hose comes complete with external grade PVC coated 19mm thick insulation.

FEATURES

- Stainless steel braided hose
- Pre-insulated with 19mm thick PVC coating
- 1" , 1-1/4" and 1-1/2" female BSP thread fitting
- 28mm / 42mm compression fitting
- Additional 80mm of insulation to cover the connectors

THE PACKAGE

- 2 x Flexible Hose
- 2 x Insulation
- 2 x Fibre Washers
- Victaulic connections are included on the 1-1/2" hoses

UIN	PART	DESCRIPTION	LENGTH	DIAMETER	FITTING 1	FITTING 2	INSULATION
236410	FH-500-42-11/2F	Flexible Hose 500 Female	500mm	42mm	1-1/2" FBSP	42mm Compression	19mm
234343	FH-750-28-11/4-F	Flexible Hose 750 Female	750mm	28mm	1-1/4" FBSP	28mm Compression	19mm
234344	FH-1000-28-F	Flexible Hose 1000 Female	1000mm	28mm	1" FBSP	28mm Compression	19mm