

# LOGIC HIU

## HEAT INTERFACE UNIT - 50 DIRECT HIGH TEMPERATURE (HT)

# 2 YEAR WARRANTY

The Logic heat interface unit is the latest ‘intelligent’ range of Logic HIUs from Ideal. The Logic HIU is the complete solution for instantaneous hot water production and space heating control.

This is a direct wall mounted HIU, providing 50 kW indirect instantaneous priority Domestic Hot Water (DHW). Central Heating (CH) is dependent upon the primary system design and pump specification.



### FEATURES & BENEFITS

- Single plate design hydraulically separates the domestic water with the space heating supplied directly from the central primary supply
- Internal electronic control unit with LCD display
- Compact and lightweight
- Fully insulated EPP front cover
- Includes differential pressure control valve (DPCV)\* supplied and fitted to the base of the unit
- Ability to pre-heating of the DHW exchanger


\* Not shown on components illustration.

### DIMENSIONS & CLEARANCES

CONNECTION	A	B	C
Thread	G $\frac{3}{4}$ "	G $\frac{1}{2}$ "	G1"***

F	Depth inc. Cover	kg
550mm	265mm	16

\*\* After shut-off valves are installed the connections become a female 3/4".

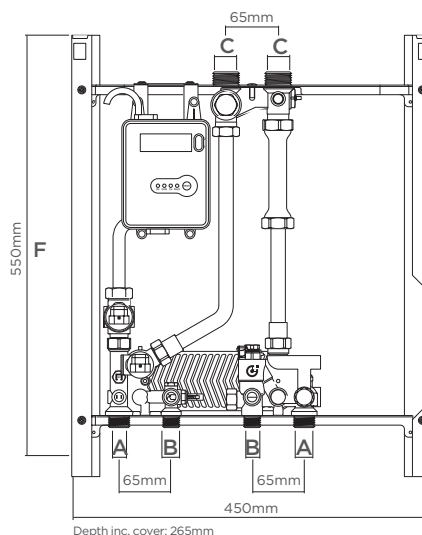

# LOGIC HIU - 50 DIRECT HT

## TECHNICAL SPECIFICATIONS

### PRIMARY PERFORMANCE

Maximum working pressure:	10 bar
Maximum temperature	85°C
Max. Percentage of glycol	30%
Max. Recommended primary circuit flow rate	1.2 m³/h

### HEATING

The temperature setting operates on the principle of set point regulation and can be fixed within application limits.

Heating Set Point	Dependent on primary system
Nom. heating exchanger net output	As primary and heating circuit controls permit
Heating circuit	Maximum pressure rating: as primary and heating circuit controls permit
Heating control circuit	VOLT FREE

### DOMESTIC HOT WATER - DHW

#### INCLUDING OPTIONAL PRE HEAT FUNCTION

The DHW function takes priority over the heating function controlled by the DHW priority flow switch.

Set Point DHW temperature	42 to 60°C
Max. Domestic hot water pressure	10 bar
DHW circuit max. flow rate	18 l/m (0.3 l/s)
Min. flow rate to activate domestic flow sensor	2.7 l/m ±0.3
Max. Differential pressure on domestic water modulating valve	Δp 0.9 bar
Min. Differential pressure on domestic water modulating valve	Δp 0.35 bar
Nom. DHW heat exchanger net output	50 kW - Logic HIU 50 Direct HT

### ELECTRICAL

Power supply	230 V (ac) ±10% 50 Hz
Max. Power consumption	105 W
Protection class	IP 40
Actuator	Stepper 24 V
Probes	NTC 10 kΩ

### CONSTRUCTION

Frame	RAL 9010 sprayed steel
Protective shell cover	EPP (Expanded polypropylene)
Components	Brass BS EN 12165 CW617N
Pipes	Stainless steel
Exchanger	Brazed stainless steel

### INCLUDED AS STANDARD

Heat Interface Unit HT	✓
Primary ball valve set	✓
Central heating flow & return valves	✓
DHW inlet and outlet connection valves	✓
Differential pressure control (DPC)	✓

### ACCESSORIES

Flushing By-pass	✓
CF Echo II	✓
CF Ultramaxx V	✓

UIN	PRODUCT NAME	METERING OPTIONS
211096	Logic HIU Direct HT	HIU only, meter not included
211349	Logic HIU Direct HT	Factory fitted, CF Echo II Mbus 1
211353	Logic HIU Direct HT	Factory fitted, CF Ultramaxx V Mbus PS

### DOMESTIC HOT WATER OUTPUT

